



Anybus X-gateway – PROFIBUS Master – Modbus TCP Server

The Anybus X-gateway allows you to seamlessly inter-connect PLC control systems and their connected devices between PROFIBUS and Modbus TCP networks.

FAST COPYING OF I/O DATA

The X-gateways primary function is with the fast transfer of cyclic I/O data between the two networks. This offloads your PLC from working with additional calculations. The gateway acts as a Master on the PROFIBUS network and a Server on the Modbus TCP network. The data transmission is completely transparent with a maximum data capacity of 512 bytes in each direction.

EASY CONFIGURATION - NO PROGRAMMING REQUIRED!

The connection between the two networks is quickly set up in the Anybus Configuration Manager software, included with the X-gateway. No programming skills are needed to set up the X-gateway. As factory default the X-gateways have a pre-defined I/O size of 20 bytes I/O.



Features and benefits

- Fast copying of cyclic I/O data between PROFIBUS and Modbus TCP networks (10-15 ms)
- Proven and tested with all PLC manufacturers
- Powerful Master interface eliminates the need for a PLC controller on the PROFIBUS network
- Supports up to a maximum of 512 bytes of Input and Output data in each direction
- Possibility to build web pages displaying and controlling a factory floor process with data from the other connected network
- Fast, dynamic transfer of fieldbus data to e.g. SCADA/HMI/Enterprise level systems based on Microsoft Windows, via the included Anybus OPC server
- Optional control status information added to I/O data for diagnostic purposes
- Robust stand-alone housing for use in harsh industrial environments
- Global free technical support and consultancy

PROFIBUS Master/Scanner interface

An Anybus X-gateway with an integrated PROFIBUS Master interface can be used when there is no existing PROFIBUS controlling PLC.


- Complete Profibus DP Master functionality according to IEC 61158
- Controls up to 125 slaves
- Optional Live List of the active status of the connected slaves (max 64 slaves)
- Maximum 512 bytes of I/O data in each direction
- Supports all baudrates up to 12Mbit/s
- Supports multiple masters (token passing)

Profibus Master/Slave configuration via the included Anybus Configuration Manager Windows tool via an RS-232 configuration port
 1x D-Sub9 Male and 1x D-Sub9 Female connector

Modbus TCP Slave interface

Modbus TCP Slave settings can be made either via the built-in web interface, or by importing the provided .EDS file into engineering tool of the controlling PLC.

- Conforms to Modbus TCP v1.0
- Modbus TCP class 0, class 1 and partially class 2 slave functionality
- 10/100Mbit operation in full or half-duplex
- Integrated FTP server provides easy file management using standard FTP clients
- Web server with dynamic data capability and Server Side Include (SSI) capability
- Email client with dynamic data capability and Event-triggered email handling
- Per-user security framework
- Quality of Service (QoS) available
- DNS Capability
- TCP/IP settings via DHCP/ARP/Anybus IPconfig (HICP)
- Integrated switch allowing for a daisy-chain topology
- 2x RJ-45 ports available simultaneously.

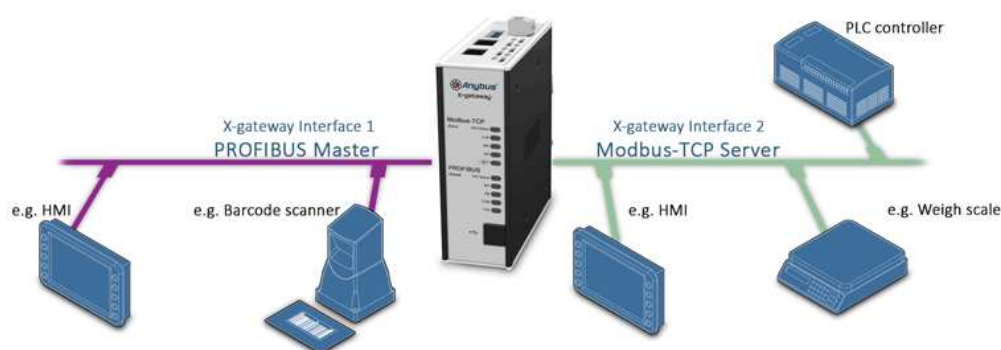

TECHNICAL SPECIFICATIONS

Dimensions (L•W•H)	114 x 44 x 127mm or 4,49 x 1,73 x 5,00"
Weight	400g or 0,880 lbs
Operating temperature	-25 to +65 °C or -13 to +149 °F
Storage temperature	-40 to +85 °C or -40 to +185 °F
Power supply	24 VDC +/- 20% via 2-pole 5.08 mm Phoenix pluggable screw connector
Current consumption	max. 400mA (Typical 200mA)
Enclosure material	Aluminium and plastic
Installation position	Vertical / Flat*
Galvanic isolation	YES, on both BUS/Ethernet side
Mechanical rating	IP20, NEMA rating 1
Mounting	DIN-rail (EN 50022 standard)
I/O configuration	via USB port with Anybus Configuration Manager software

Certifications	CE, CULUS, RoHS
-----------------------	-----------------

File	Version	Size	Read online
------	---------	------	-------------

Ordering information

Order Code	AB7629
Included components	Gateway Quick start documentation USB configuration cable Serial cable for PROFIBUS master configuration Resource CD with PROFIBUS master configuration software Power supply not included Configuration and Anybus OPC server software is available for download.

3 year guarantee. For purchasing instructions and terms and conditions, see: [How to buy](#).

Copyright © 2020 HMS Industrial Networks - All rights reserved.